


IXP220 System Specifications

1. IXP220 Stand-Alone Controllers (ISC962-1-0-GB or IPS963-1-0-GB):

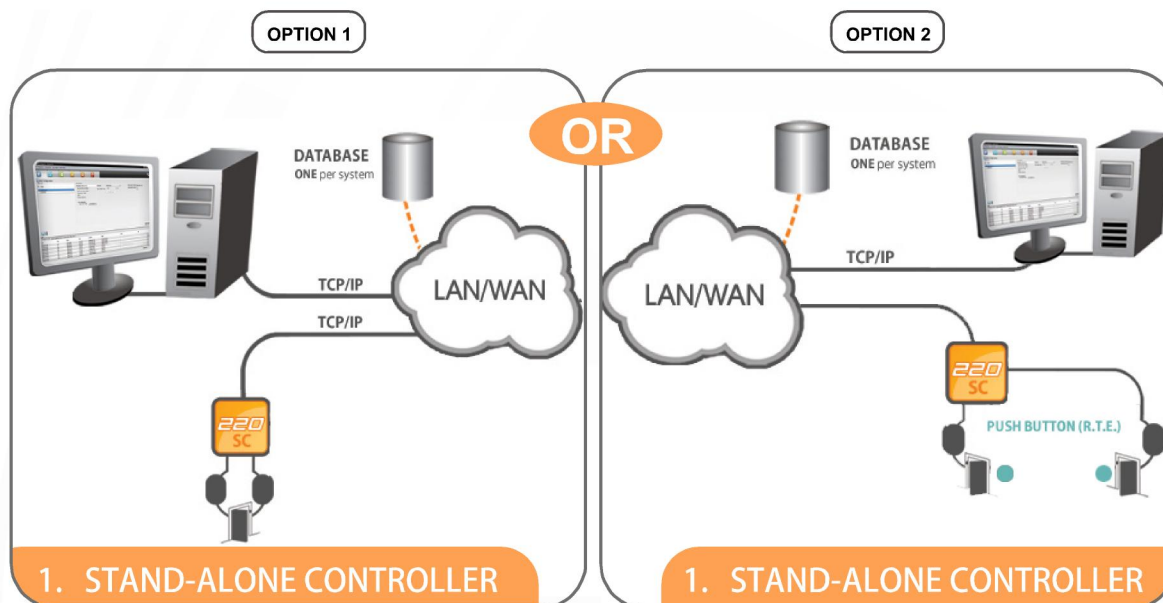

- The Controller can be connected using RS232, USB or TCP/IP
- The IXP220 software is free
- Tags are enrolled using Reader 1
- The optional USB Registration Reader (ISR900-1-0-GB) can be used
- A Stand Alone Controller cannot communicate with other Controllers or to hardware connected to its Terminal bus.
- The Stand-Alone Controller can be upgraded to a System Controller using ISU902-0-0-GB (a soft unlock).

Minimum System requirements:

- 1 x Stand-Alone Controller (ISC960-1-0-GB or IPS961-1-0-GB)
- 1 x Reader (a second Reader is required for an APB or second door)